

# **TECHNICAL SPECIFICATION**

# Stainless steel cover with synthetic surface recess PBN14-S0250



File: 2016-01-25

PRODUCT SUPPORT
Paweł Ciechanowski
p.ciechanowski@polanik.com

fax +48 44 646 43 58


e-mail: info@polanik.com www.polanik.com



## I. General description


The cover is one of the elements of the horizontal jumps athletics facility equipment. It is designed to protect the foundation tray of the take-off board and to blank the gap in the runway when the take-off board is removed from the tray.

## II. Technical data

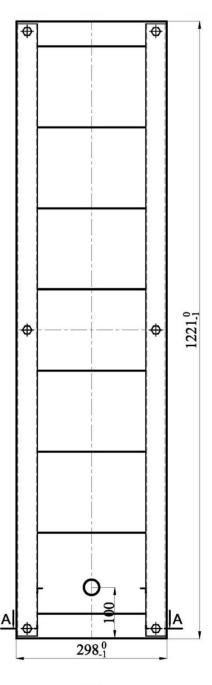

| Code          | PBN14-S0250                  |  |
|---------------|------------------------------|--|
| Туре          | blanking cover               |  |
| Material      | stainless steel sheets and   |  |
|               | screws                       |  |
| Construction  | welded, ribbed, 6 adjustable |  |
|               | feet                         |  |
| Dedicated for | S-250, S12-250, S14-250      |  |
| Weight [kg]   | 16                           |  |


[mm]



POLANIK Poland, Życzliwa 11 97-300 Piotrków Trybunalski tel. +48 44 646 44 81 tel. +48 44 648 50 89 fax +48 44 646 43 58 e-mail: info@polanik.com www.polanik.com





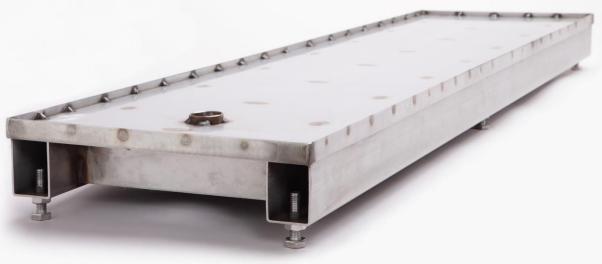


PBN14-S0250 © 2016 Polanik

 $The \ producer \ reserves \ the \ right \ to \ introduce \ without \ warning \ changes \ in \ product \ constructions \ and \ colours.$ 




#### III. Operation and maintenance

To place the cover the foundation tray is to be empty, so the take-off board and the base board with the drainage plastic grids (depending on the take-off board model) should be removed.

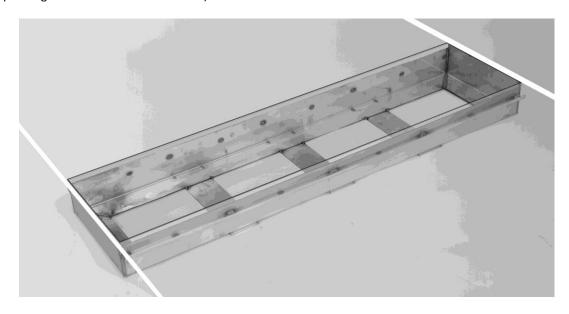

The cover is recommended for the sprayed synthetic surface. The synthetic surface installed on its top covers the metal edges, so when the cover is placed in the tray it fits flash with the runway and forms an even and safe surface for the athletes.

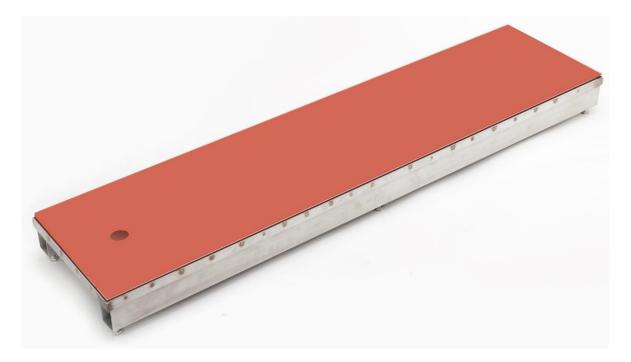

The synthetic surface should have the same parameters as the synthetic surface on the facility runway.


tel. +48 44 646 44 81 tel. +48 44 648 50 89

tel. +48 44 648 50 89 www.polanik.com fax +48 44 646 43 58



After the cover has been placed in the tray, please make sure that the top surface of the cover is levelled with the top surface of the runway. If not the cover feet have to be adjusted.

e-mail: info@polanik.com

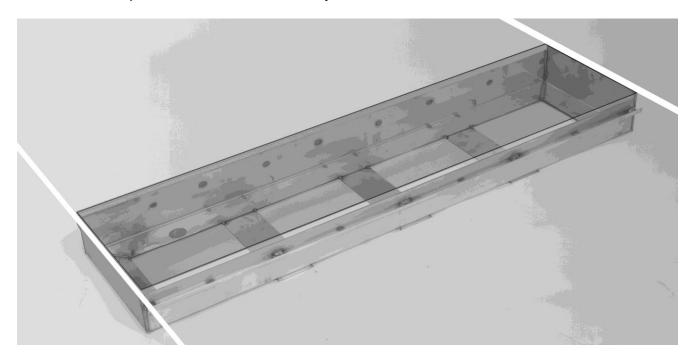

IV. Packing and transport
It is foiled and fastened to a pallet.

POLANIK Poland, Życzliwa 11 97-300 Piotrków Trybunalski tel. +48 44 646 44 81 tel. +48 44 648 50 89 fax +48 44 646 43 58 e-mail: info@polanik.com www.polanik.com



#### V. Declaration

1) No. 2016-01-25

2) Issuer's name: POLANIK

Issuer's address: Zyczliwa 11, 97-300 Piotrkow Tryb.

3) Object of declaration:

| No. | Description of goods                           | Code        |
|-----|--|-------------|
| 1   | Stainless steel blanking cover with edges 8 mm | PBN14-S0250 |