

POLANIK  
Poland, Życzliwa 11  
97-300 Piotrków Trybunalski

tel. +48 44 646 44 81  
tel. +48 44 648 50 89  
fax +48 44 646 43 58

e-mail: [info@polanik.com](mailto:info@polanik.com)  
[www.polanik.com](http://www.polanik.com)



**Technical specification**  
**Instruction manual**

**High jump school landing area**

**W-636**



File: 2014-07-18

Product support  
Paweł Ciechanowski  
[p.ciechanowski@polanik.com](mailto:p.ciechanowski@polanik.com)



**Thank you for choosing Polanik landing area.**

#### **Safe assembly and use**

- **ATTENTION! VACCUM PACKED PRODUCT – UNPACK IMMEDIATELY AFTER DELIVERY**
- Before you start to assemble and use the landing area please read this manual carefully and store the manual in a safe place for further reference. Polanik Sp. z o. o. shall not be liable for any damages which are the result of the failure to follow this manual.
- Unauthorized copying of this manual, in whole or in part, is prohibited.
- The contents of this manual are subject to change without notice.
- Warning! The sports equipment produced by Polanik Sp. z o. o. is designed for athletics training and use in sports competitions only. Please pay special attention when using the product, misuse of athletics equipment can cause serious injury or in extreme cases even death. That is why training and use during sports events have to be always supervised by authorized sports personnel. In no event shall Polanik Sp. z o. o. be liable for any special, incidental, indirect or consequential damages in connection with the purchase or use of POLANIK products or costs over the original cost of the product.
- Specific warranty terms:
  - 1) The use of the landing area outdoors requires a waterproof cover and a landing area platform for proper insulation from the ground. Failure to follow the above restrictions results in the loss of the warranty rights.
  - 2) The top pad of the landing area is equipped with a spike resistant mesh fabric. The mesh fabric is designed to protect the landing area against spikes used by jumpers. While landing and walking on the top pad the spikes go through the mesh fabric and do not damage the surface. One must not shuffle the spikes on the mesh fabric, because under high crosswise stress caused by moving the spikes without lifting the feet, it may happen that the top pad will be torn. The damages of the top pad caused by careless sliding the pikes on the top pad surface are excluded from the warranty and can be removed in course of payable repair or replacement of the landing area elements.

## Contents

| Chapter                           | Page |
|-----------------------------------|------|
| I. General description            | 4    |
| II. Technical specification       | 4    |
| III. Packing and transport        | 5    |
| IV. Preparation for the first use | 5    |
| V. Assembly                       | 5    |
| VI. Operating                     | 6    |
| VII. Maintenance                  | 6    |
| VIII. Storing                     | 6    |
| IX. Declaration                   | 7    |

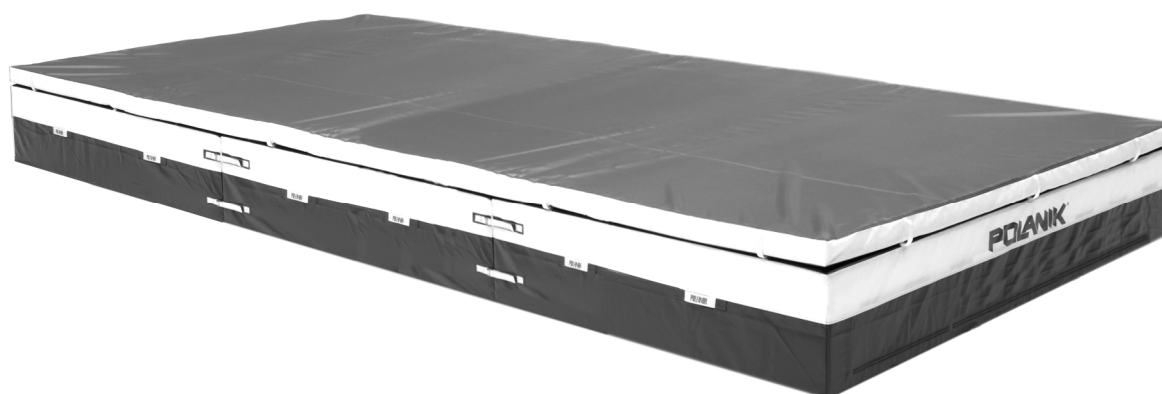


## I. General description

POLANIK landing area W-636 is top quality sports equipment which is designed to secure jumpers and absorb impact energy of a jumper's landing after take-off and flight in high jump training.

## II. Technical specification

| Code                                   | W-636  |
|--|--|
| Dimensions length / width / height [m] | 6 / 3 / 0,6  |
| Weight [kg]                            | 230 kg   |
| Number of segments [pcs]               | 4  |
| Spike resistant surface                | upper surface of top pad is equipped with spike resistant mesh fabric        |
| Segment covering                       | PVC, made of polyester with two vinyl layers                                 |
| Internal structure                     | advanced 3-layer construction, made of high quality PUR foam                 |
| Way of segment linking                 | stainless steel hooks and D-rings  |
| Way of waterproof cover linking        | metal D-rings  |
| Carrying handles                       | very strong jacquard webbing, firmly attached by means of envelope stitching |

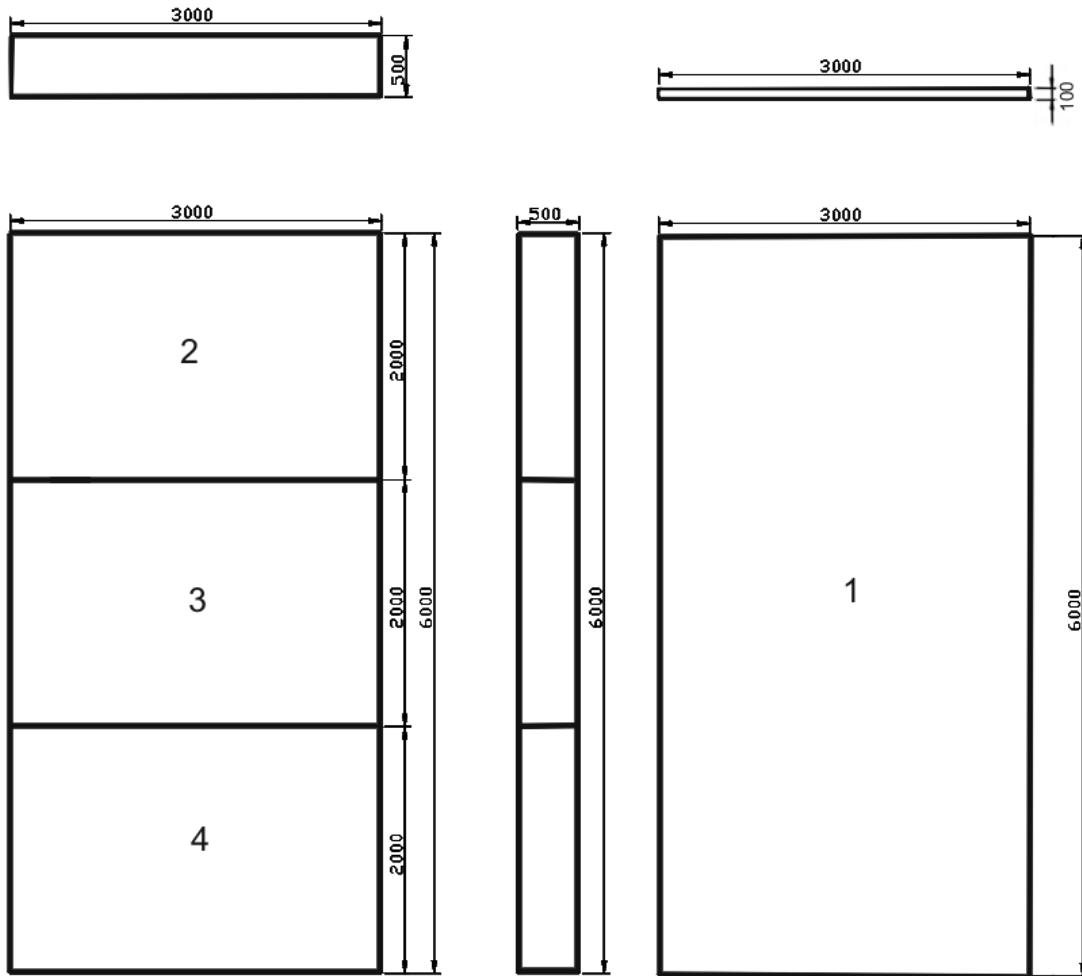

### III. Packing and transport

The dimensions\* of the vacuum packed landing area segments:

| Seg. no.                            | Description             | Weight [kg] | Length L [m] | Width B [m] | Height H [m] |
|-------------------------------------|-------------------------|-------------|--------------|-------------|--------------|
| 01                                  | Top spike resistant pad | 51,5        | 2,00         | 0,60        | 0,60         |
| 02                                  | Main segment            | 60          | 1,90         | 0,65        | 0,65         |
| 03                                  | Main segment            | 60          | 1,90         | 0,65        | 0,65         |
| 04                                  | Main segment            | 60          | 1,90         | 0,65        | 0,65         |
| <b>Total volume [m<sup>3</sup>]</b> |                         |             | <b>3,13</b>  |             |              |
| <b>Total gross weight [kg]</b>      |                         |             | <b>231,5</b> |             |              |

\*Please note that the dimensions can differ from the above table in the range of +/- 7%.


### IV. Preparing for first use

The landing area elements are vacuum packed only for transport. Please unpack them immediately after delivery and leave them in a roofed place for few hours, so that they can return to their original shapes. **Storing vacuum packed landing area elements may cause permanent damages in their internal structures.** When the landing area elements return to their original dimensions, you can place them in high jump field. The field surface should be even, smooth

and without any obstacles. If you use the landing area outdoors, you should also provide: a special waterproof cover P-636 to protect the landing area against unfavourable weather conditions and a modular platform SW-6x3 to insulate the landing area from the ground.

## V. Assembly


It is done in 5 easy steps :

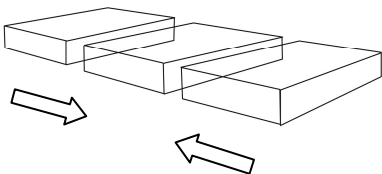


place the main segments of the landing area in the high jump facility,



using the jacquard webbing belts and self-locking buckles located on the segment sides fasten the segments to each other,

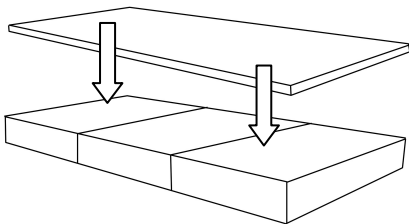

place the top pad on the landing area main segments,



then fasten the top pad to the main segments using the snap hooks and D-rings,



now the landing area is ready for use.

## VI. Operating

Stepping on the landing area and practising require special footwear designed for those purposes. Treading on the landing area in footwear with spikes is only allowed when the landing area is equipped with special spike resistant surface. Stepping on the landing areas in hard footwear or in shoes with heels is strongly prohibited. You must not put any tables, chairs, benches or any other objects whose unit pressure exceeds  $1\text{kg}/1\text{cm}^2$  on the landing area. If the landing area is moved from one place to another very often, it is recommended that a landing area cart should be used.

## **VII. Maintenance**

Due to the hygiene requirements it is recommended that the landing area should be cleaned regularly with commonly available detergents. Before you start wiping the landing area, please try to clean a small spot on its bottom side in order to check the reaction with the PVC fabric.

## **VIII. Storing**

The landing area segments can be stored only in a horizontal position. They cannot be bent or pressed by any objects during storing. That may deform the segments permanently. A storing facility should be clean and dry. It ought to provide min. temperature 5° C.

Even the best technical solutions cannot substitute for common sense. The usage of the product must take place under the supervision of qualified coaches. The producer shall not be liable for any incidents caused by the improper assembly or its misuse. The producer reserves the right to introduce without warning changes in product constructions and colours.

## IX. Declaration

- 1) No. 2008-08-05
- 2) Issuer's name: POLANIK Sp. z o. o.  
Issuer's address: Życzliwa 11, 97-300 Piotrkow Tryb.
- 3) Object of declaration:

| Position | Description                                 | Code         |
|----------|---|--------------|
| 1        | High jump school landing area 6 x 3 x 0,6 m | <b>W-636</b> |

- 4) The object of declaration described above is in conformity with the requirements of the following documents:

| Document No.  | Title  | Edition/Date of issue | Position  |
|---------------|--|-----------------------|-----------|
| PN-EN 12503-2 | Sports mats – Part 2: Pole vault and high jump mats, safety requirements | April 2004            | All above |

### Additional Information

- 5) Declaration for:  
BUYER and USER


Signed for and in behalf of:

POLANIK

2014-07-18 Piotrkow Tryb.  
(Date and place of issue)

Pawel Ciechanowski  
Product Manager

- 6) .....  
(Name, function)

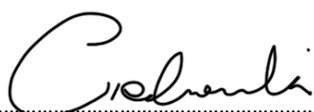  
.....  
(Signature or equivalent authorized by the issuer)