

TECHNICAL SPECIFICATION **INSTRUCTION MANUAL**

Hurdle cart for competition hurdles

HC-34




File: 2015-12-08

PRODUCT SUPPORT
Paweł Ciechanowski
p.ciechanowski@polanik.com

I. General description and use




HC-34 has got a durable aluminium construction, anodized in silver colour. It is equipped with an ergonomic handle and a catch for electric truck shaft.

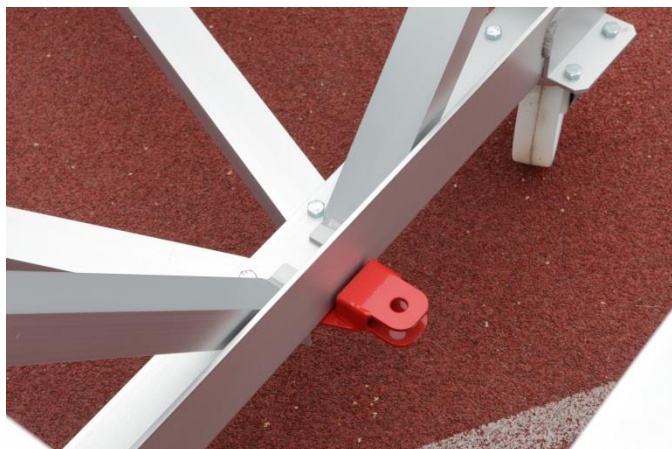

HC-34 © 2015 Polanik The producer reserves the right to introduce without warning changes in product constructions and colours.

II. Technical specification


[mm]

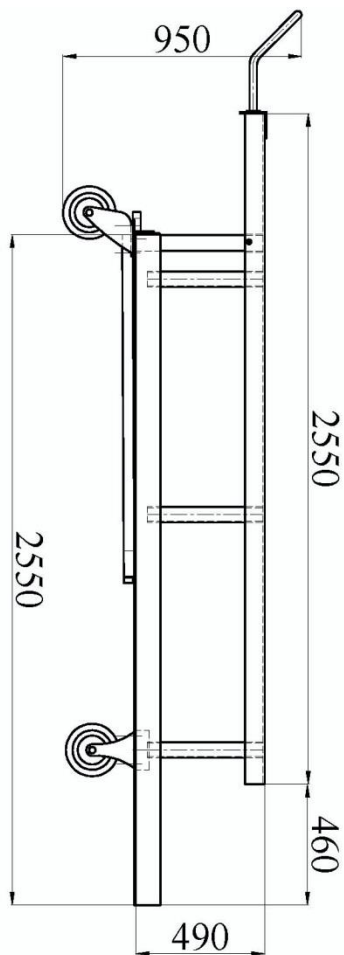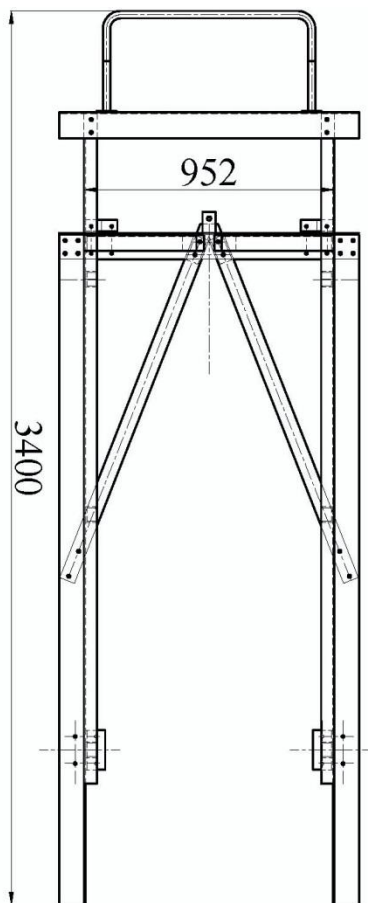

Code	HC-34
Type	aluminium, anodized
Use on	synthetic track, concrete and asphalt
Capacity	30 pcs of PP-170 and 40 pcs of PP-171/PP-173
Handle	included
Catch for truck shaft	included
Net weight [kg]	80

IV. Operation and maintenance

When Polanik collapsible hurdles with round feet (PP-171 and PP-173 series) are loaded on the cart, they should be alternately shifted to the cart sides, see the images below:

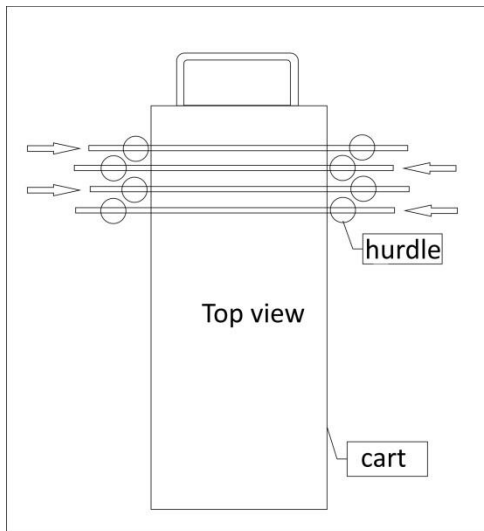

The hurdles with square feet (PP-170 series) are put one behind another, see the image below:



The cart must be stored in a roofed and dry place. The wheel excels should be greased once a year.

V. Packing and transport

The cart is packed in a case:

Box's dimensions [m]	contents	1 pc
	length L	3,12
	width B	0,42
	height H	0,55
Volume [m³]		0,72
Gross weight [kg]		100